


5 4 3 2 1



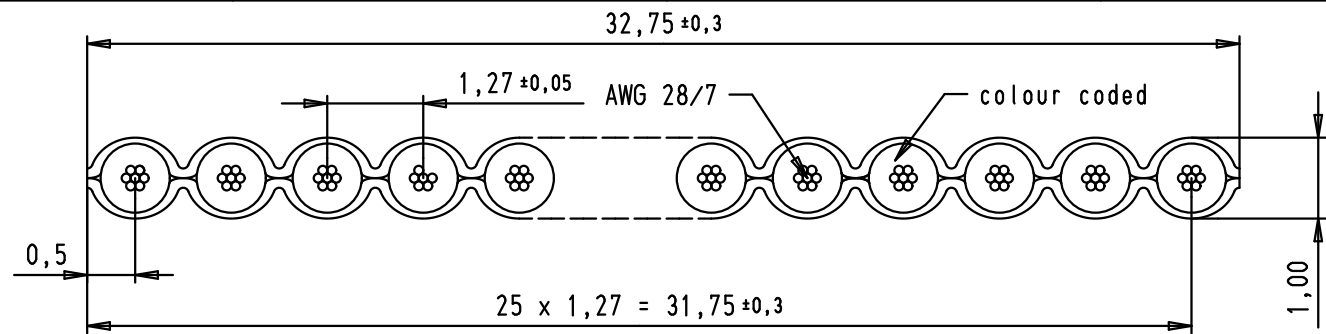

Wire _____ Cu tinned
 Gauge _____ AWG 28/7
 Voltage rating _____ 300 Vr.m.s
 Current (Max) _____ 2,1A
 Conductor resistance _____ 221 mΩ/m
 Capacity unbalanced _____ 42,7 pF/m
 Impedance unbalanced _____ 105 Ω
 Inductance unbalanced _____ 0,68 μH/m
 Signal delay _____ 4,9 ns/m
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating) to 105°C
 _____ -30°C (static)
 Flammability rating _____ UL: VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

A

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable	Maßstab/ Scale	
			Detail.	20/10/05	JMDR		26 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	10:1	
			Insp.						
EC01446	12/02/10	SC	Stand.						
							TB 09 18 026 7005	Blatt/ Page	
33990	14/05/07	PK	HARTING EURL F-95972 Paris					Sub.	1/1
33246	20/10/05	JMDR							
Mod.	Dot.	Name							