


1

2

3

4

5

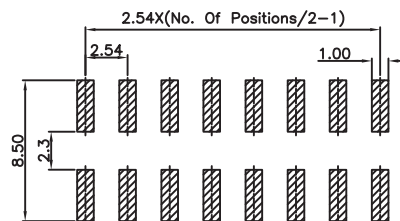

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: NYLON 6T
 FLAMABILITY RATING: UL94-V0
 MAX TEMPERATURE: 260°C 10 S
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOYS
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER IEC 60 603-13
 PITCH: 2.54MM




ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 3A MAX
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING
 JEDEC LEAD FREE REFLOW SOLDERING

PACKAGING
 TAPE & REEL WITH CAP

DIMENSION
 A = 2.54 x (NB. PIN / 2 - 1)
 B = 2.54 x NB. PIN / 2

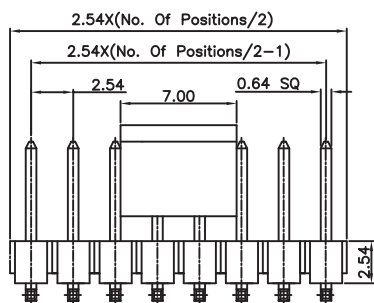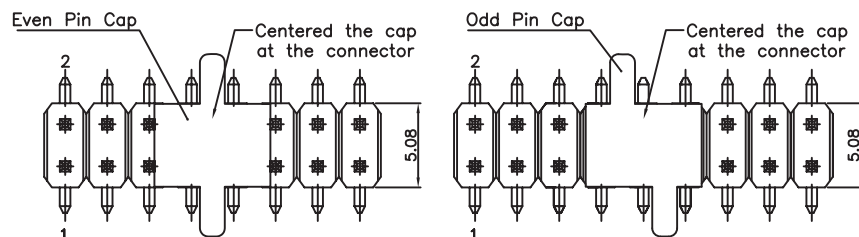

RoHS Compliant

G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	
F						
E	04-MAR-13	DRAWING	QL			
D	29-JUL-09	PACKAGING	JP			
C	09-NOV-07	PAGE 2	CH	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 2.54MM DUAL SMT PIN HEADER WERI PART NO: 6103 xx 21121
B	25-OCT-07	PAD SIZE	EC		SCALE:	
A	29-DEC-06	PDF	JP		SHEET: 1/2	
REV	DATE	FILE	BY		DRAW: MARY	

SIZE

A4

A

B

C

D






1

2

3

4

5

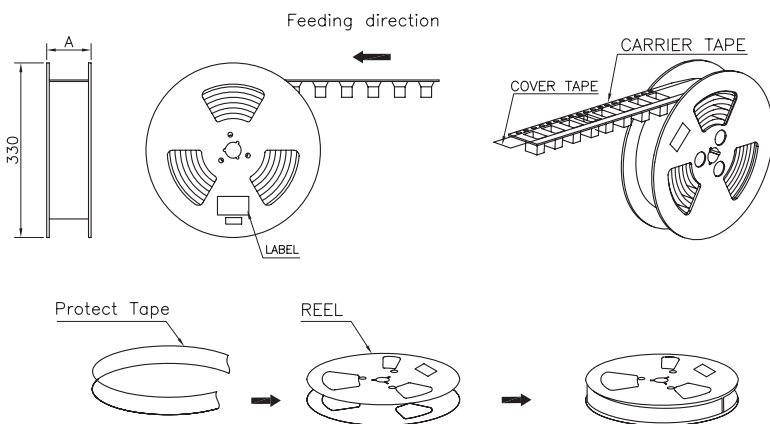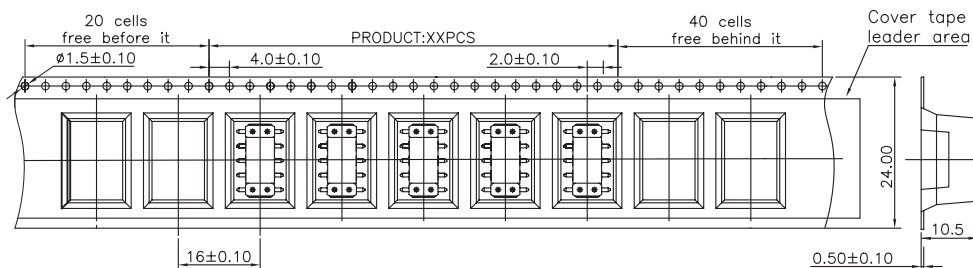

SPECIFICATIONS:

1. DIMENSION

REEL SIZE: 330*AMM

PE BAG SIZE: 0.8*710*720(MM)

CARTON SIZE: 350*350*296(MM)

SET SPUAR SIZE: 35*25.5*270(MM)









NADIR COVER SIZE: 330*330(MM)

2. QUANTITY:

300PCS/REEL

XXREEL/ CARTON


Q'TY: XXXPCS



Pin No	W	A	PCS/R	R/CTN	Q'TY
04-08	24	29	300	9	2700
10-14	32	37	300	7	2100
16-24	44	49	300	5	1500
26-32	56	61	300	4	1200
34-44	72	77	300	3	900

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = \pm 0.2.XX = \pm 0.15

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 2/2

DRAW: MARY

DESCRIPTION: 2.54MM DUAL SMT PIN HEADER

WERI PART NO: 6103 xx 21121

SIZE

A4

G			
F			
E			
D			
C			
B			
A			
REV	DATE	FILE	BY