



- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. RATING: 25mA, @50V DC
  4. OPERATING FORCE: 120gf
  5. TERMINALS TO BE GOLD PLATED

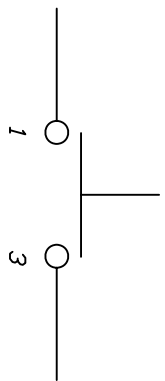

CIRCUIT: SPST  
CONTACT CONFIGURATION

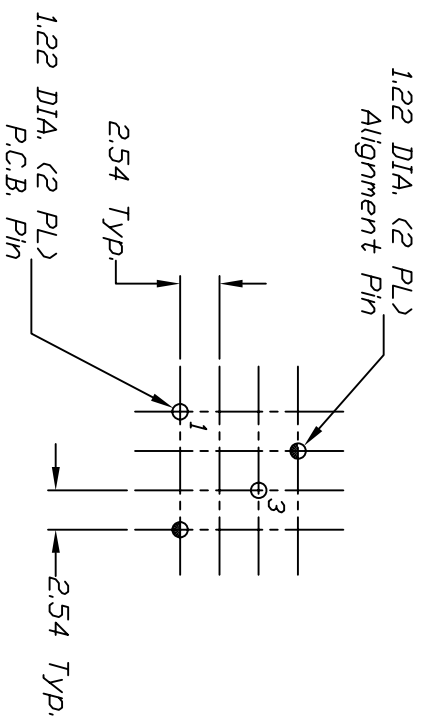

RECOMMENDED P.C.B. LAYOUT

B	11167	REVISED	1/12/01	CJB
A	10590	RELEASED FOR PRODUCTION	4/4/00	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE		330 E1-1 BLK. (Gold Plated Contacts)		
SCALE	DATE	DR	DWG	REV
2:1	4/4/00	MM	XB0003P	B

