
## PDU3V20D354A

## 3-Phase Power Strip for Automatic Transfer Switch Installations

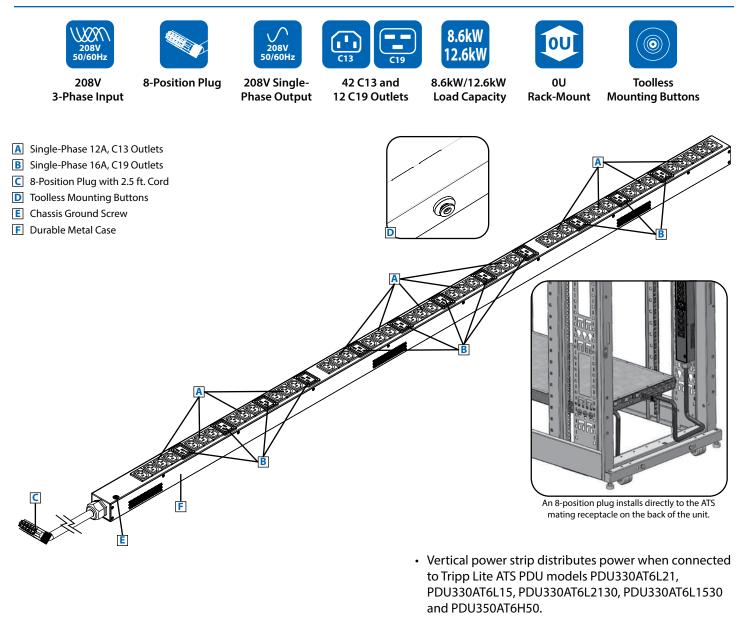

FC NOM

208V (3-Phase Input/Single-Phase Output)

8-Position Plug with 7-Conductor Cord

70 x 2.2 x 2.2 in. / 1778 x 56 x 56 mm

Tested to UL 60950-1 (USA), CSA (Canada),

NOM (Mexico), FCC Class A (Emissions), ROHS

8.6 or 12.6kW (depending on ATS PDU model)

PDU3V20D354A

50/60 Hz

2.5 ft. / 0.8 m (x42) C13, (x12) C19

9.3 lb. / 4.2 kg

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

0U (Vertical) Rack-Mount

**Specifications** 

Model

Voltage

Outlets

Unit Weight

Standards

Frequency

Load Capacity Input Plug

Input Cord Length

**Primary Mounting Options** 

Unit Dimensions (H x W x D)

- Supports up to 8.6kW total output with 13.9A maximum per output bank when connected to 208V ATS models with a 24A input rating
- Supports up to 12.6kW total output with 20A maximum per output bank when connected to 208V ATS models with a 35A input rating

## SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

