## CSD1006AC

## 10-Device Desktop AC Charging Station with Surge Suppression







2880 Joules of

**Surge Protection** 



Filterina








Adjustable Storage Shelf Dividers



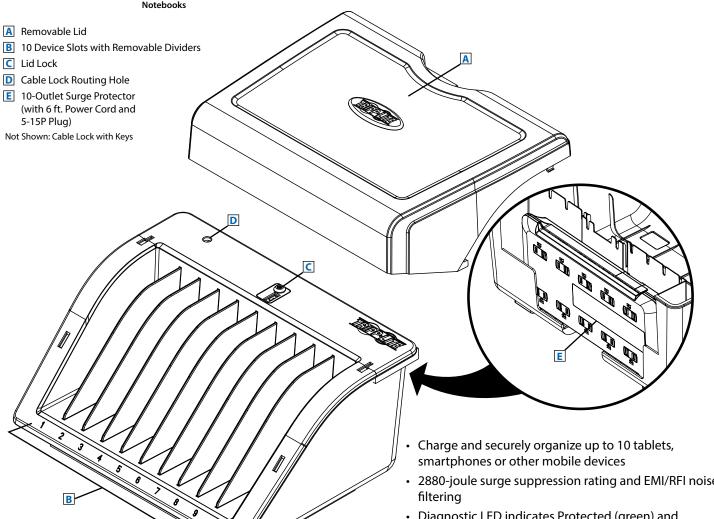


**Specifications** Model CSD1006AC Outlet (x10) 5-15R Input Connection Type 5-15P Input Cord Length 6 ft. (1.83 m) **AC Surge Suppression Rating** 2880 joules Operating Temperature 41° to 95°F (5° to 35°C) Storage Temperature -4° to 122°F (-20° to 50°C) Relative Humidity 20% to 80% Meets UL 1449 3rd Edition and RoHS standards Regulatory Compliance


- 2880-joule surge suppression rating and EMI/RFI noise
- Diagnostic LED indicates Protected (green) and Grounded (red)
- Removable dividers customize the unit's storage space according to the number and size of devices being charged
- · Overcurrent and overcharging protection prevents damage to device circuitry and battery

## SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com








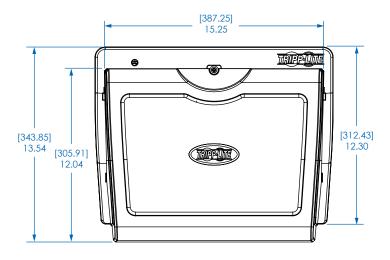



TOP VIEW





DIVIDER TRAY TOP VIEW



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.