

## REVISION B

## RECOMMENDED PCB LAYOUT FOR QSH-XXX-XX-X-D-RA-XXX



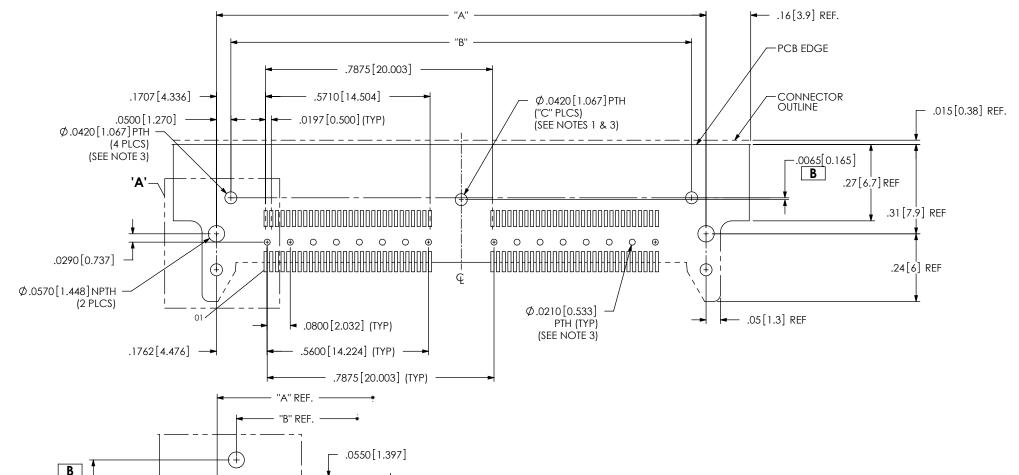

	1	— "B" REF. ———*
		0550[1.397]
<b>B</b>		.0530[1.346]
.1250[3.175]		①970[2.464]
<u> </u>		
		.0700[1.778]
		0110[0.279] (TYP)

DETAIL 'A'

TABLE 1				
No OF BANK	"A"	"B"	"C"	
-01	.9125 [23.178]	.8125 [20.638]	N/A	
-02	1.7000 [43.180]	1.6000 [40.640]	1	
-03	2.4875 [63.183]	2.3875 [60.643]	2	

## NOTES:

- 1. NOT REQUIRED FOR ONE BANK CONNECTOR.
- 2. ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.
  3. TO BE SOLDERED USING PASTE-IN-HOLE TECHNOLOGY.

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.



