
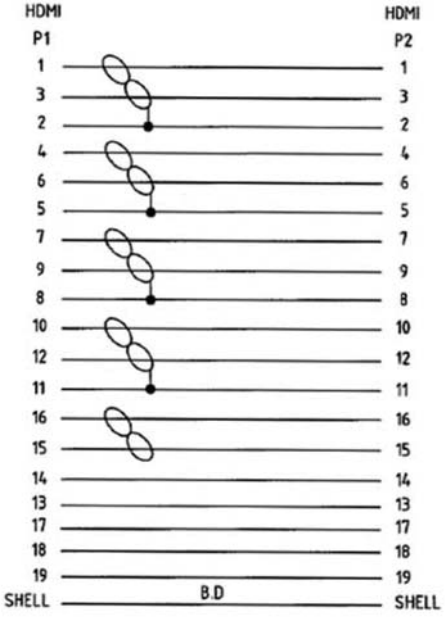


1 2 3 4 5 6 7

A B C D E F G H

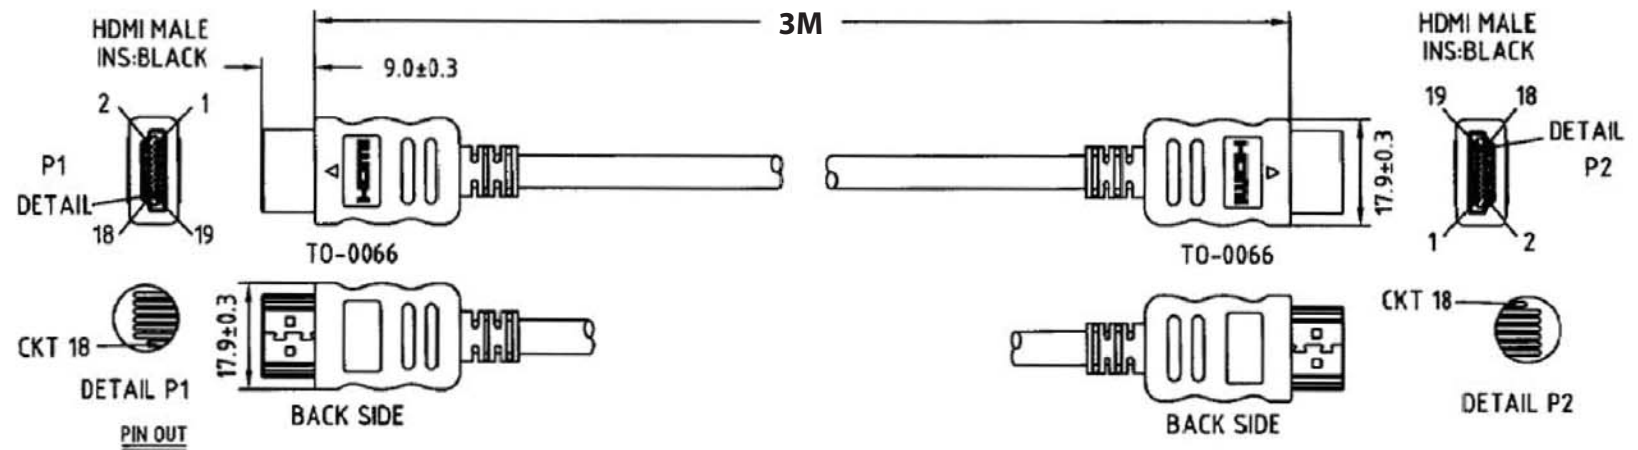

Material:

- Cable: UL-20276 [#28(7/0.103 T.C)x1P INS: FO-SKIN +D.W(7/0.103 T.C) + AL/MY(spread the Wring)]x4C+#28(7/0.103 T.C)x1P INS:HD-PE+#28(7/0.103 T.C)x5C INS:HD-PE+AL/MY+ Drain Wire(7/0.103 T.C)
B.D(85%) PVC Jacket, OD: 6.0±0.2MM color: Black(NK-K01)
- Connector: P1&P2: HDMI 19P Male Contact: 30μ”; Nickel Plated Shell
- Shield: P1&P2: Inner mold must be wrapped copper to connector shell & cable braid
- Hood: P1&P2: Molded Type, PVC 45P, Color: Black(NK-K01).

Electrical:

- 100% Short, open & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 10Ω Min.
- Hi-Pot Voltage: 300V DC



| | | | | | | | | |
|-----------|-------|--------------|------|------|----------|----------|------------------------------|--|
| Scale | 1:1 | | | | | Name | Item No. AK627-3-R | |
| TOLERANCE | | | | | Drawn | 10.21.11 | | Title <=>HDM1(M) <=> HDMI(M), 3 Meters 1.2 Type |
| X.X | ±0.40 | | | | Approved | 10.24.11 | | |
| X.XX | ±0.25 | | | | | | | |
| X.XXX | ±0.15 | | | | | | Drawing No. | |
| Angle | ±3° | | | | | | rev00 | |
| | | | | | | | Replace | |
| | | | | | | | Sheet | |
| | | Modification | Date | Name | | | | |

1 2 3 4 5 6 7